



DFR4(56)-CST

120V, 220V-230V and 277V
4" and 5/6" LED Round Surface & Recessed Disk Light, CCT Selectable(optional)



Catalog #		Type
Project		Date
Prepared by		

4" & 6" LED

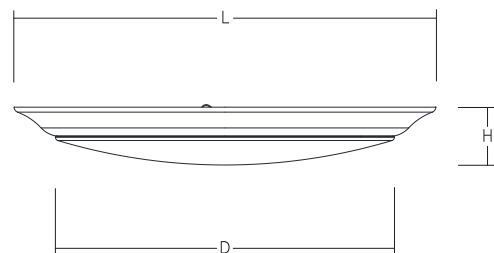

■ Dimension Table

Housing	[DFR4-CST-12]	[DFR56-CST-15]
Overall Diameter (L)	5-7/8" (Ø150mm)	7-3/8" (Ø188mm)
Diffuser Diameter (D)	3-7/8" (Ø98mm)	5-1/2" (Ø141mm)
H (Height)	1-1/8" (30mm)	1-1/4" (32.5mm)

DESCRIPTION

DFR series accomplishes the task of recessed downlight without a time and cost of labor for drywall ceiling. It's designed to use either a direct 3.5" & 4" J-Box or to allow exiting recessed housing retrofitted.

SPECIFICATION

HOUSING	DFR4-CST-12	DFR56-CST-15
Wattage (Typ)	12W	15W
Lumen (Typ)	730(90CRI)	850 / 1,100(90CRI)
Efficacy (LPW)	61 lm/W	57 lm/W / 73 lm/W
Beam Angle	108.5°	110°
CRI (Typical)	80, 90	
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K	
Dimming	Triac(Consult with factory for approved dimmers)	

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- Hard gauge metal back plate and the heat sink to facilitate heat dissipation.
- PC diffused lens delivers perfect light distribution.
- 90CRI Standard. Available in 2700K, 3000K, 3500K, 4000K and 5000K.
- Triac dimmable standard.
- CCT Selectable(Optional)-CCT change to each step by built-in slide switch

Listing

- CSA-us Certified
- State of california Title 24
- Energy star Approved & Listed
- Wet location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Finish	Optional Kit for Recess Mount
DFR4-CST-12 12W, CCT Selectable	8 80	27 2700K	WH White	4MTL DFR4 kit for 4" Recess cans
DFR56-CST-15 15W, CCT Selectable	9 90	30 3000K	BK Black	
		35 3500K	BN Brush Nickel	
		40 4000K	BZ Bronze	5,6MTL DFR56 kit for 5/6" Recess cans
		50 5000K		

*Consult with factory for CCT range

*Consult with factory for custom finishes

Example : DFR56-CST-15-930-WH

-

-

J-Box Mounting

