


DFR56(9)-OCC^C


120V

5/6" and 9" LED Recessed Disk Light with Occupancy Sensor, 3CCT Selectable



Catalog #		Type
Project		Date
Prepared by		

6" & 9" LED

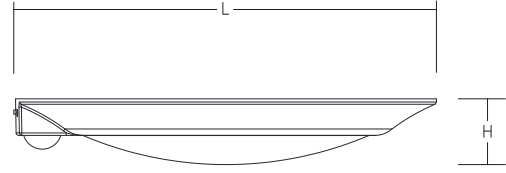





3

OCCUPANCY Sensor Settings

OCCUPANCY SENSOR OPERATION

There are 3 sensor settings on the side. Use a flat screwdriver to adjust.



- 1. Area :** Sensor activation area can be set for a diameter of t to a maximum of 20ft.  max.20ft
- 2. 0%-30% :** The fixture can be set at default brightness of 0% (not lit in OFF condition) or 30% (maintain 30% of full output in OFF condition).  Night Time
- 3. Time :** Time options from 0 to 5 minutes for ON time after activation.  0-5 mins

Dimension Table

Housing	[DFR56-OCC-13]	[DFR9-OCC-16]
Overall Diameter (L)	7-7/16" (Ø188.7mm)	9-13/16" (Ø249.7mm)
H (Height)	1-7/16" (36.7mm)	1-9/16" (39mm)

SPECIFICATION

HOUSING	DFR56-OCC-13	DFR9-OCC-16
Wattage (Typ)	13W	16W
Lumen (Typ)	930~1,070	1,210~1,325
Efficacy (LPW)	82 lm/W	82 lm/W
Beam Angle	105°	105°
CRI (Typical)	90	
Color (+/-5%)	3000K, 4000K, 5000K	
Dimming	Triac(Consult with factory for approved dimmers)	

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- PC diffused lens delivers perfect light distribution.
- 90CRI only. Available in 3000K, 4000K and 5000K.
- CCT Selectable(Optional)-CCT change to each step by built-in slide switch
- Multi-functional occupancy sensor to adjust range / time delay / 30% dimming
- Suitable for closet installation
- Triac dimmable standard.


Listing

- CSA-us Certificated
- Energy star Approved & Listed
- State of California Title 24
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Finish	Optional Kit for Recess Mount
DFR56-OCC-13 13W, Occupancy Sensor	9 90	30 3000K	WH White	5,6MTL DFR56 kit for 5/6" Recess cans 
DFR9-OCC-16 16W, Occupancy Sensor		40 4000K	BK Black	
		50 5000K	BN Brush Nickel BZ Bronze	
*Consult with factory for CCT range			*Consult with factory for custom finishes	*For DFR56-OCC Only

Example : DFR56-OCC-13-930-WH
 - -

J-Box Mounting

