


DFR9(-CST)


120V, 220V-230V and 277V

9" LED Low Profile Round Surface & Recessed Disk Light, CCT Selectable(optional)



| | | |
|-------------|--|------|
| Catalog # | | Type |
| Project | | Date |
| Prepared by | | |

9" LED

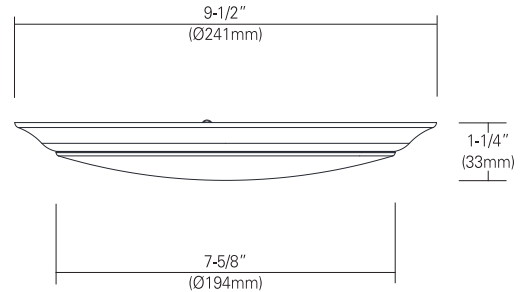

DESCRIPTION

DFR series accomplish the task of recessed downlight without the time and cost of labor with drywall. It's designed to either use a direct 4" J-Box or allow exiting recessed can to be retrofitted.

SPECIFICATION

| HOUSING | DFR9(-CST)-20 | DFR9(-CST)-30 |
|----------------|--|---------------|
| Wattage (Typ) | 20W | 30W |
| Lumen (Typ) | 1,200(90CRI) | 1,800(90CRI) |
| Efficacy (LPW) | 60 lm/W | 60 lm/W |
| Beam Angle | 110° | |
| CRI (Typical) | 80, 90 | |
| Color (+/-5%) | 2700K, 3000K, 3500K, 4000K, 5000K | |
| Dimming | Triac(Consult with factory for approved dimmers) | |

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- Hard gauge metal back plate and the heat sink to facilitate heat dissipation.
- PC diffused lens delivers perfect light distribution.
- 90CRI Standard. Available in 2700K, 3000K, 3500K, 4000K and 5000K.
- Triac dimmable standard.
- CCT Selectable(Optional)-CCT


Listing

- CSA-us Certified
- Energy star Approved & Listed
- State of California Title 24
- Wet location

Warranty

- 5years of lamp life.

J-Box Mounting

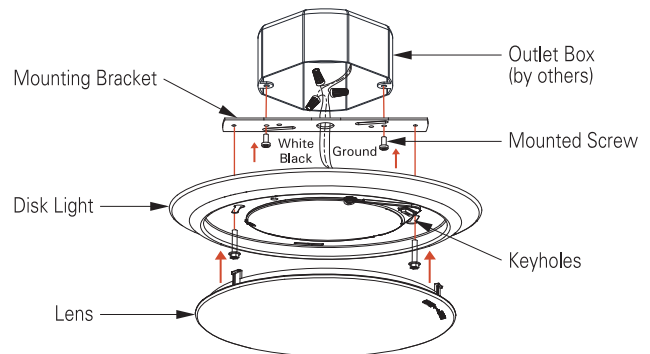

ORDERING INFORMATION

| Housing | CRI | CCT | Finish | Optional Kit for Recess Mount |
|--|-------------|-----------------|------------------------|--|
| DFR9-20 9", 20W | 8 80 | 27 2700K | WH White | 5.6MTL DFR56 kit for 5/6" Recess cans |
| DFR9-CST-20 20W, CCT Selectable | 9 90 | 30 3000K | BK Black | |
| DFR9-30 9", 30W | | 35 3500K | BN Brush Nickel | |
| DFR9-CST-30 30W, CCT Selectable | | 40 4000K | BZ Bronze | |
| | | 50 5000K | | |

*Consult with factory for CCT range

*Consult with factory for custom finishes

Example : DFR9-20-930-WH

- -