




# DLED-666S-DOB

6" Square Architectural Downlight  
15W, 20W & 30W LED, 120V ~ 277V Input



Catalog #		Type
Project		Date
Prepared by		

## 6" Architectural LED

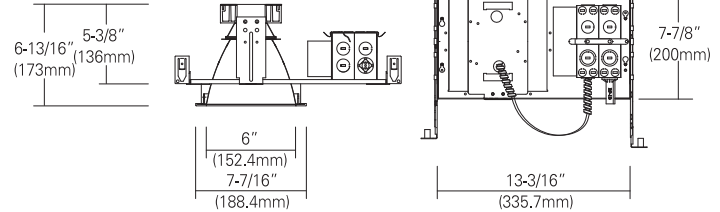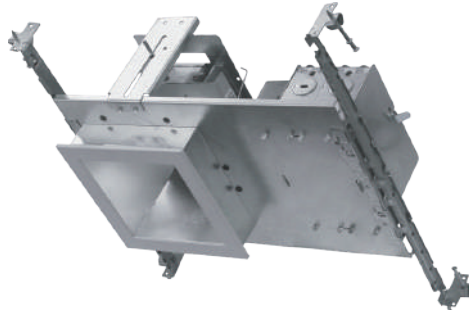

Ceiling Cut-out : 7" x 7"

**DESCRIPTION**

6" Square Architectural Downlight combined with LED module and integral reflector. This is designed for use in non-insulated ceiling. Insulation material must be kept a minimum of 3" from fixture.

SPECIFICATION			
LED Quantity	1EA		
Input Voltage	120V ~ 277V AC		
Wattage (Typ)	<b>15 W</b>	<b>20 W</b>	<b>30 W</b>
Lumen (Typ)	1,050	1,400	2,100
Efficacy (LPW)	70 lm/W	70 lm/W	70 lm/W
Beam Angle	20° / 40° / 70°		
C R I (Typical)	80, 90		
Color (+/-5%)	2700K, 3000K, 4000K, 5000K		
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)		

## FEATURES and FUNCTIONS

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1-1/4" thick.
- Aluminum extruded Heat sink designed to facilitate heat dissipation
- Heavy gauge aluminum reflector anodized in clear, haze, gold, champagne and pewter color finish.
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings. Housing can be positioned at any point within 24" joist span.
- Optional-Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.
- 120~277V AC LED module with perfect dimming of Triac and 0-10V on one module.

**Listing**

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

**Warranty**

- 5years of lamp life.

### ORDERING INFORMATION

Housing	Watts	CRI	CCT	Beam Angle	Trim	Reflector Finish	Metal Trim Ring Finish
DLED-666S-DOB 6", DOB	15 15W	8 80	27 2700K	<b>N</b> Narrow	TML-614S	HC Haze Clear WH White	WH White BK Black
	20 20W	9 90	30 3000K	<b>M</b> Medium			
	30 30W		40 4000K 50 5000K	<b>W</b> Wide			
*Option - EM=Emergency battery backup					*Consult with factory for custom finishes		
<b>Example : DLED-666S-DOB-15-830-W</b> <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/>					<b>Example : TML-614S-HC-WH</b> <input type="text"/> - <input type="text"/> - <input type="text"/>		