


LS04-FC


120V and 220V-230V, Triac Dimmable

Lamp n Socket



Catalog #		Type
Project		Date
Prepared by		

Lamp n Socket

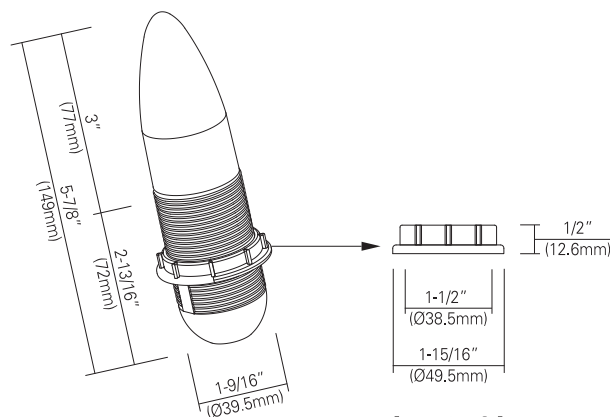

[E27 RING]

DESCRIPTION

One piece LED lamp on socket with outer threaded ring to lock on any kind of lamp shades and diffusers. Patented AC LED Module driving by unique IC on board with 7W power delivering 500 lumens by 2700K~5000K color temperature. The designation entirely cleared problem of shadow from a LED bulb with tall heat sink in traditional lamp holder.

FEATURES and FUNCTIONS

LED Module

- 7 Watt AC LED module with integrated IC designated driver on board of module creating 500 lumens CRI 80+ with 2700K~5000K color temperature, equivalent to 60 watt incandescent, 26watt CFL lamp and 10~100% triac dimmable.
- Recommended for use max. 60 lamps per run of 600W loaded dimmer switches and 30 lamps per dimmer switches 300W loaded.
- Standard is for 120V AC. also available 220V AC.
- Designed circuit to prevent inrush current hurting dimmer switches and module.

Lens

- High lumen transmission and diffusing for even illumination.
- Available in plastic & glass diffuser of each round and candle shape.

Electrical Connection

- Standard 6" AWG18 105° rated black and white leads.

Heat Sink

- Metal and plastic conjugated molded piece with outer threaded for assembly lamp shade or diffusers by casted ring.
- Colored in White.

Mounting

- Provided various size of hickey with 1/8 IPS threaded to fit on 1/8-27 NPSM nipple or threaded pipe in fixtures provided a threaded plastic ring nut to fix shades or diffusers.


Listing

- UL Recognized
- State of California Title 24
- Energy star Approved & Listed

Warranty

- 5years of lamp life.

Mount Detail



ORDERING INFORMATION

* Consult with factory for approved dimmers

Housing	CRI	CCT	Lens Type
LS04-FC 7W	8 80	27 2700K	PC Plastic Candle Shape diffuser
	9 90	30 3000K	GC Glass Candle Shape diffuser
		40 4000K	
		50 5000K	

Example : LS04-FC-830-PC

- -