


# LVR4


## 120V~277V

LED Vapor Tight Linear Fixture



Catalog #		Type
Project		Date
Prepared by		

### LED

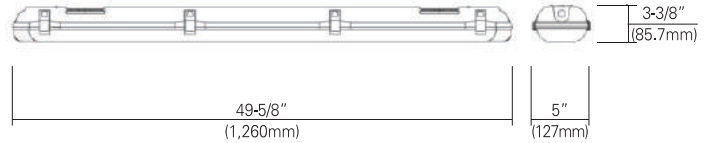

**DESCRIPTION**

A cost effective and energy efficient alternative to fluorescents, the LED vapor Lock Fixture, features a full-length, gasketed polycarbonate lens and single piece non-corrosive (PC) Polycarbonate body. Designed to meet or exceed IP65 ratings against dust and pressurized water jets. Ideal for use as utility lighting in parking garage and stairwells, in tunnels or hallways, or anywhere meeting applicable building and safety codes. Effective advanced AC module in low profile and driverless along easy installation and cost effective.

SPECIFICATION			
HOUSING	LVR4		
Wattage (Typ)	35W	50W	70W
Lumen (Typ)	3,500	5,000	7,000
Efficacy (LPW)	100 lm/W	100 lm/W	100 lm/W
CRI (Typical)	80		
Color (+/-5%)	4000K, 5000K, 5700K		
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)		

- FEATURES and FUNCTIONS**
- Single piece polycarbonate body and gasketed polycarbonate lens.
  - IP65 rated against ingress of dust and water jets from all directions.
  - 120V~277V AC LED module with integrated IC chip imbed on board.
  - Microwave motion sensor available.
  - 0-10V dimming standard.
  - Operating Temperature: -22°F to 122°F
  - Surface mount with two removable, snap-in mounting brackets.
  - Tool-less lens lock system for easy wiring access.
  - 1/2" conduit access on either end.
  - Gasketed UV resistant polycarbonate lens
- Listing**
- CSA-us Certificated
  - State of California Title 24
  - DLC qualified
  - Wet location(IP65)
- Warranty**
- 5years of lamp life.

### ORDERING INFORMATION

Housing	Watts	CRI	CCT	Options
LVR4 4'	35 35W 50 50W 70 70W	8 80	40 4000K 50 5000K 57 5700K	<b>MOS</b> Microwave Motion Sensor <b>EMBB</b> Emergency Battery Backup

Example : LVR4-35-840

-  -