



# SLT

120V, 220V-230V and 277V  
LED Stairwell Linear Fixture



Catalog #		Type
Project		Date
Prepared by		

Linear LED

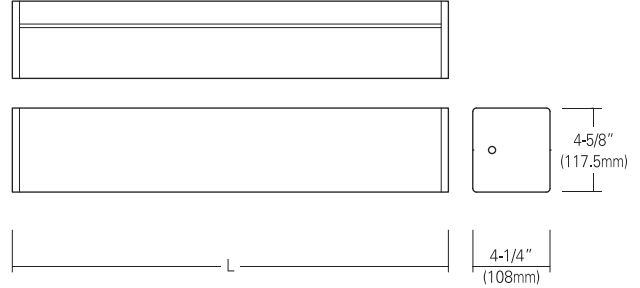

#### Dimension Table

Housing	[ SLT24-20 ]	[ SLT48-35 ]
L (Length)	24-1/4" (610mm)	48-1/4" (1,220mm)

#### DESCRIPTION

Safety, reliability, and efficiency are just a few things that come to mind when thinking stairwell lighting. SLT LED Stairwell Lights deliver just that in a simple and practical design. Increase energy savings with the built-in motion sensor, by only lighting the stairwell when occupied.

#### SPECIFICATION

HOUSING	SLT24-20	SLT48-35
Wattage (Typ)	20W	35W
Lumen (Typ)	2,000(80CRI)	3,500(80CRI)
Efficacy (LPW)	100 lm/W	100 lm/W
Beam Angle	120°	
CRI (Typical)	80, 90	
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K	
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)	

#### FEATURES and FUNCTIONS

- Single piece polycarbonate body and gasketed polycarbonate lens.
- 120~277V AC LED module with integrated IC chip imbed on board.
- Microwave motion sensor, Daylight sensor and Occupancy sensor available.
- Emergency battery back-up available.
- 0-10V dimming standard.
- Operating Temperature: -22°F to 122°F
- Surface mount with two removable, snap-in mounting brackets.
- Tool-less lens lock system for easy wiring access.
- High-efficiency acrylic lens
- Finish - White Standard.

#### Listing

- CSA-us Certificated
- State of California Title 24
- DLC qualified
- Damp location

#### Warranty

- 5years of lamp life.

#### ORDERING INFORMATION

Housing	CRI	CCT	Finish	Options
SLT24-20 24", 20W	8 80	27 2700K	WH White  *Consult with factory for custom finishes	<b>MOS</b> Microwave Motion Sensor, Daylight Sensor and Occupancy Sensor <b>EMBB</b> Emergency Battery Backup <b>MOS-EMBB</b> Both
SLT48-35 48", 35W	9 90	30 3000K		
		35 3500K		
		40 4000K		
		50 5000K		

Example : SLT24-20-840-WH

-  -