


STL-810

120V, 220V-230V and 277V


LED Mini Size Step Light



Catalog #		Type
Project		Date
Prepared by		



Step LED

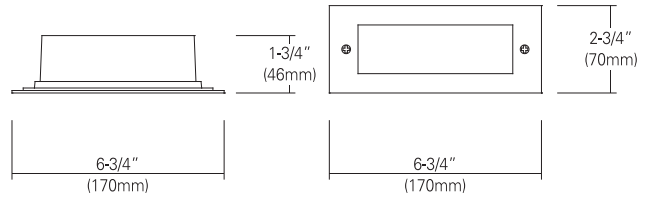

DESCRIPTION

The STL-810 is designed with linear LED module permanently installed in the fixture for easier, economical maintenance as of long lasting life of LED and supper fuctional smooth dimming by Trailing & Leading edge dimmers in the market.

SPECIFICATION

HOUSING	STL-810
Wattage (Typ)	5W
Lumen (Typ)	220
Efficacy (LPW)	44 lm/W
C R I (Typical)	80, 90
Color (+/-5%)	2700K, 3000K, 4000K, 5000K
Dimming	Triac or 0-10V(Consult with factory for approved dimmers)

FEATURES and FUNCTIONS

- Cast aluminum housing with stainless steel face plate.
- No heat radiation.
- Wet location listed to IP65 for indoor and outdoor installation.
- Tempered frosted glass diffused lens delivers perfect light distribution.
- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market. Also available with 220V-230V AC module.
- 120V or 277V direct wiring , no drive needed.

Listing

- CSA-us Certificated
- State of california Title 24
- Energy star Approved & Listed
- Wet location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Trims	Finish
STL-810 5W	8 80 9 90	27 2700K 30 3000K 40 4000K 50 5000K	TM-801 Open TM-802 Grilled	SN Satin Nickel

*Consult with factory for custom finishes

Example : STL-810-830-TM-801-SN

- - -