

VNT


120V, 220V-230V and 277V

LED Linear Clouds & Vanity



Catalog #		Type
Project		Date
Prepared by		

Linear LED

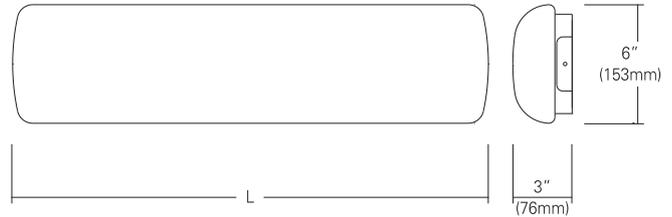

Dimension Table

Housing	[VNT24-20]	[VNT36-30]	[VNT48-40]
L (Length)	24" (610mm)	36" (915mm)	48" (1220mm)

DESCRIPTION

The long-lasting, energy-efficient VNT is perfect for a variety of residential and commercial surface mount application. Its AC Direct DOB make it to save some space and light weight to easy installation and full length diffuser in geometry allows for even light distribution.

SPECIFICATION

HOUSING	VNT24-20	VNT36-30	VNT48-40
Wattage (Typ)	20W	30W	40W
Lumen (Typ)	1,500(80CRI)	2,250(80CRI)	3,000(80CRI)
Efficacy (LPW)	75 lm/W	75 lm/W	75 lm/W
CRI (Typical)	80, 90		
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K		
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)		

FEATURES and FUNCTIONS

- 120V AC LED module with integrated IC chip imbed on board and 10-100% Triac dimming with most of leading and trailing edge dimmer switches in the market.
- Ideally use for vanity lighting in bathrooms, stairways, hallways, hospital rooms
- White acrylic diffusers mounting horizontally or vertically mounting on wall. It makes space expands and relaxing atmosphere.
- Designed for wall mounting to hard wires in Junction box.

Listing

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT
VNT24-20 24", 20W	8 80	27 2700K
VNT36-30 36", 30W	9 90	30 3000K
VNT48-40 48", 40W		35 3500K
		40 4000K
		50 5000K

Example : VNT24-20-840

-