

VRPR


120V and 120V-277V

LED Wraparound Linear Fixture with Row-Surface or Pendant Mounted



Catalog #		Type
Project		Date
Prepared by		

Linear LED

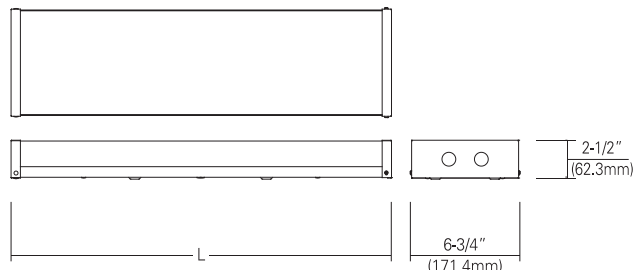

Dimension Table

Housing	[VRPR24-20]	[VRPR48-40]
L (Length)	24" (609.6mm)	47-7/8" (1,214.5mm)

DESCRIPTION

The long-lasting and energy-efficient wraparound type fixture provides a perfect for a variety of residential and commercial surface mounted application. Offering 2ft and 4ft and most commercial features such as universal voltage, 0-10V dimming, and quick surface and suspension mount. Suitable for the offices, schools, stairways, retail or other light commercial places.

SPECIFICATION

HOUSING	VRPR24-20	VRPR48-40
Wattage (Typ)	20W	40W
Lumen (Typ)	2,000(90CRI)	3,500(90CRI)
Efficacy (LPW)	100 lm/W	87.5 lm/W
CRI (Typical)	80, 90	
Color (+/-5%)	3000K, 4000K, 5000K	
Dimming	Triac or 0-10V (Consult with factory for approved dimmers)	

FEATURES and FUNCTIONS

- Formed steel housing in white coated.
- Lens is made from impact-resistant polycarbonate and patterned design providing uniform coverage.
- Driver and internal components are accessible from below the ceiling.
- Endcaps come with 7/8" diameter knockout for conduit entry.
- LED module - Lumen maintenance of L82 at 50,000 life, and available in all CCTs with a CRI \geq 80.
- Isolated UL Listed/Recognized LED driver with dimming to 10%, minimum.

Listing

- CSA-us Certificated
- State of California Title 24
- Energy star Approved & Listed
- Damp location

Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	CRI	CCT	Driver	Finish
VRPR24-20 24", 20W	8 80	30 3000K	UTD 120V, Triac Dimming (Standard)	WH White
VRPR48-40 48", 40W	9 90	40 4000K 50 5000K	UZTD 120~277V, 0~10V Dimming	

*Consult with factory for custom finishes

Example : VRPR24-20-840-UTD-WH

- - -