


OUTDOOR Light

WCED-3(U)D(P)

120V, 220V-230V and 277V

3" LED Wall & Pendant Mount Cylinder Light (Up/Down & Down Type)



Catalog #		Type
Project		Date
Prepared by		

3" LED Cylinder





WCED-3D
(DOWN TYPE)




WCED-3UD
(UP/DOWN TYPE)



WCED-3DP
(PENDANT DOWN TYPE)

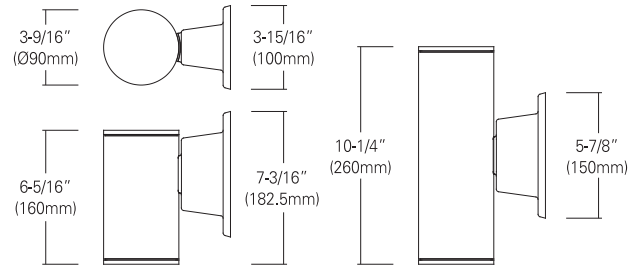

[WCED-3D]



[WCED-3UD]

DESCRIPTION

Wet location(IP65) rated outdoor use round cylinder type wall or pendant mount with downlight and up & down light. 13W and 17W LED AC module by customized IC, embedded circuit on board for full (5% lowest) dimming by most of Triac or 0-10V dimming switches in the market. Low heat, long life running from DOB technology can warrant more than 5 years in weather change circumstances with (-30 °C ~ +40 °C) range.

SPECIFICATION

HOUSING	WCED-3(U)D(P)	
Wattage (Typ)	13W	17W
Lumen (Typ)	910(80CRI)	1,190(80CRI)
Efficacy (LPW)	70 lm/W	70 lm/W
Beam Angle	13° / 28° / 37°	
CRI (Typical)	80, 90	
Color (+/-5%)	2700K, 3000K, 3500K, 4000K, 5000K	
Dimming	Triac & 0-10V the both(Consult with factory for approved dimmers)	

FEATURES and FUNCTIONS

- Main body by weather proof aluminum powder coated white, black and silver finish for outdoor/indoor applications
- 13W and 17W 120V DOB modules with integrated circuit on board with customized chips (No driver needed)
- Hanging aircraft cable is standard. Also available in stem rod(For down type only)
- Also available in photocell sensor and day light harvest.
- 80, 90 CRI, 2700K, 3000K, 3500K, 4000K and 5000K
- Triac dimming is standard. Also available 0-10V dimming.

Listing

- CSA-us Certificated
- State of california Title 24
- Energy star Approved & Listed
- Wet location (IP65 Rated)

Provided

- SENSOR



Warranty

- 5years of lamp life.

ORDERING INFORMATION

Housing	Watts	CRI	CCT	Beam Angle	Housing Finish	Aircraft Cable Length	Option
WCED-3D Down Type	13 13W	8 80	27 2700K	N 13°	WH White	12 12 Inches	PCR Photocell Sensor
WCED-3UD Up / Down Type	17 17W	9 90	30 3000K	M 28°	BK Black	18 18 Inches	
WCED-3DP Pendant Down Type			35 3500K	W 37°	SI Silver	24 24 Inches	
			40 4000K			36 36 Inches	
			50 5000K			48 48 Inches	
*Consult with factory for custom finishes						*For pendant Mount Only	

Example : WCED-3DP-13-840-N-WH-12

- - - - -