



# DLH-9250/DL-9250A

## 5" Pull Down Adjustable For

Halogen MR16 and PAR16/20 Lamps

Catalog #		Type
Project		Date
Prepared by		

### HALOGEN & INCANDESCENT

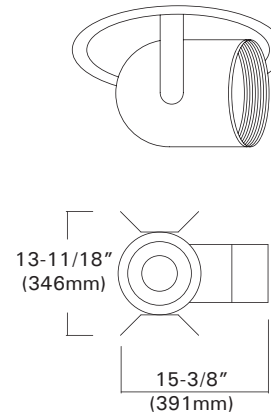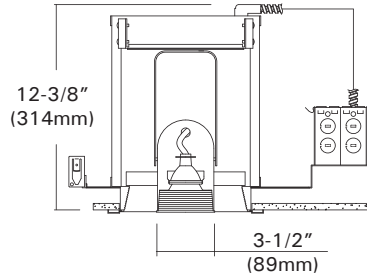

#### DESCRIPTION

Pull Down Directional lamp housing for MR-16, PAR16 and PAR20 offers flexible accents from recessed source, adjusting 0°~ 80° Vertical to horizontal directions.

**Ceiling Cut-out :** 5-11/16"  
**Lamp, Max, Watt. :** 75W / MR16  
 60W / PAR16  
 50W / PAR20

#### DESIGN FEATURES

##### ◦ Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR16/20 incandescent lamp and MR16 halogen lamp installed with magnetic or electronic transformer on j-box.
- Black painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.

##### ◦ Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90° branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

##### ◦ Mounting Channel Bracket

- Commercial mounting kit provided up to 5" vertical adjustment, which accommodates 1/2" EMT conduit, optional HB-24 or HBC-24 bar hanger or lathing channels for T-bar grid or concealed spline ceiling.

##### ◦ Trim

- Included black or white check baffle in the lamp head and white metal thin ring in the aperture.

##### ◦ Direction adjustment

- Adjustable lamp position for fully recessed as down lighting, semi-recessed spot light or bullet spot light.
- Lamp may adjust from 0°~ 80° vertically and rotate 358° when pulled fully down.

##### ◦ Thermal Protector

- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or mis-applied insulation.

##### \* Listing

- UL, c-UL listed for damp location.

#### Ordering Information

Housing	Transformer	Voltage	Baffle Finish	Option
<input type="checkbox"/> DLH-9250 (Halogen Low Voltage)	<input type="checkbox"/> -E50 : 50W Electronic -M50 : 50W Magnetic -E75 : 75W Electronic -M75 : 75W Magnetic	<input type="checkbox"/> -Blank : 120V -27 : 277V	<input type="checkbox"/> -WH : White -BK : Black	<input type="checkbox"/>
<input type="checkbox"/> DL-9250A (Incandescent)	N/A	N/A		

Example : DLH-9250-M50-WH  
 DL-9250A-WH