
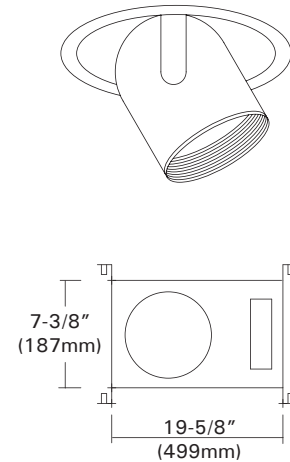


# DL-9261H

## 6" Flat Frame with Pull Down Adjustable For PAR30 CMH Lamp

Catalog #		Type
Project		Date
Prepared by		

### METAL HALIDE

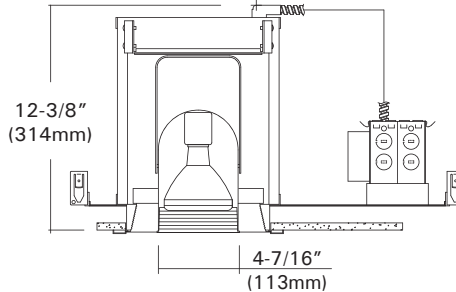

#### DESCRIPTION

Pull Down Directional lamp housing for max. 70W PAR30 CMH lamp offers flexible accents from recessed source, adjusting 0°~80°. Vertical to horizontal directions.

#### DESIGN FEATURES

Ceiling Cut-out : 6-1/2"  
Lamp, Max, Watt. : 70W / PAR30 CMH

##### ◦ Housing

- C-UL listed, NON-IC, thermally protected housing for vertical PAR30 CMH lamp.
- Painted heavy metal housing and compact frames designed to fit in commercial / architectural construction.

##### ◦ Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out)
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

##### ◦ Bar Hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

##### ◦ Trim

- Included black or white check baffle in the lamp head and white metal thin ring in the aperture.

##### ◦ Direction adjustment

- Adjustable lamp position for fully recessed as down lighting, semi-recessed spot light or bullet spot light.
- Lamp may adjust from 0°~80° vertically and rotate 358° when pulled fully down.

##### ◦ Electronic Ballast

- 120 and 277 volts for 50/60Hz operation high power factor.
- Class A sound rated.
- These frames may install only electronic ballast and can be provided with magnetic ballast in a remote box.

##### ◦ Thermal Protector

- Self resetting thermal detector on J-box deactivates fixture if overheating occurs due to improper lamping or mis-applied insulation.

##### \* Listing

- UL, c-UL listed for damp location.

#### Ordering Information

Housing	Ballast	Lamp(s) Watt.	Baffle Finish	Voltage	Option
DL-9261H	-E : HID Electronic Ballast	39 : 39W 70 : 70W	-WH : White -BK : Black	-Blank : 120V -27 : 277V	-CB : Multiple Channel Bracket

Example : DL-9261H-E70-WH