


# ICF-626AT

## 6" IC Type Horizontal Double Wall Housing For (1) DTT/TTT or (2) DTT Lamps


Catalog #		Type
Project		Date
Prepared by		

**FLUORESCENT**

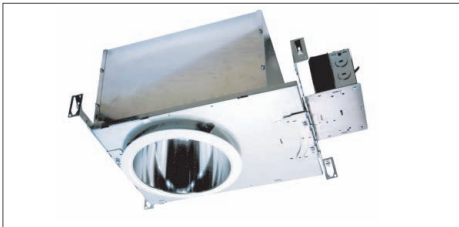

### DESCRIPTION

The ICF-626AT is an IC type 6" aperture housing for (1) or (2) horizontal CFL lamps. The ICF-626AT is designed for insulated ceilings and can be in direct contact with ceiling insulation. This AIR-TIGHT housing design prevents airflow through ceiling for saving heating and air conditioning costs. The ICF-626AT offers a wide choice of trim types including reflector, lensed and wall wash trims.

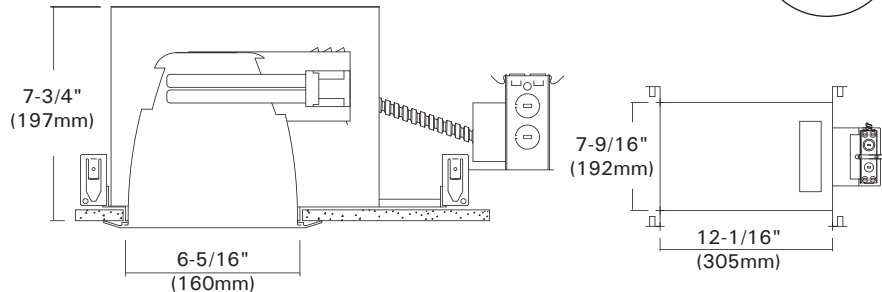

### DESIGN FEATURES

**Ceiling Cut-out : 6-1/2"**  
**Lamp, Max, Watt. : (1)32W or (2)18W**

#### • Mounting Frame

- Galvanized steel construction.
- Housing adjusts for ceilings up to 1-1/4" thick.

#### • Junction Box

- Listed for through branch circuit wiring. (Max. 8 No 12 AWG 90°C branch circuit conductors. (4 in, 4 out))
- (5) 1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

#### • Reflector

- Anodized clear, gold, champagne, pewter color finished full reflectors. And anodized reflectors with black or white milled groove baffle collar.

#### • Trim Ring

- White plastic ring or plated chrome, satin nickel, polished brass, natural steel color ring.

#### • Bar hangers

- 24" Bar Hangers provide stability and support on joists and T-Bar Grid ceilings.
- Housing can be positioned at any point within 24" joist span.
- Score lines allow "toolless" shortening for 12" joists. Bar hangers may be repositioned 90 degrees.
- Integral T-bar clips snaps onto T-bars and no additional clips are required.

#### • Socket

- G24Q/GX24Q socket for use 4 pin DTT, TTT lamps.

#### • Socket Housing

- Installed (4 pin) plastic lampholders in stamped galvanized steel housing attached on the reflector top.

#### • Lamp

- Compact, Fluorescent lamps.
  - \* DTT-Double twin tube (Quad/CFQ)
    - (1) or (2) 13W DTT (4 pin)
    - (1) or (2) 18W DTT (4 pin)
  - \* TTT-Triple Twin Tube (CFTR)
    - (1) 26W TTT (4 pin)
    - (1) 32W TTT (4 pin)

#### • Ballast


- Class P Thermally protected by internal fuse (3 amp fast blow), Multi-volt electronic ballast or thermal cut-out switch in magnetic ballast.
- High Power Factor Multi-volt Electronic ballasts for 4 pin type compact fluorescent lamps mounted on J-box door for easy access form inside of fixture.

#### \* Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

#### • Just-A-Nail

Adjustable nail hanger bar for easy alignment.

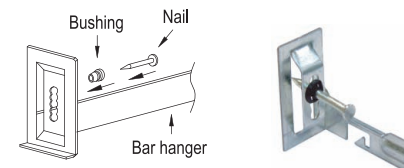

#### JUST-A-NAIL

- Pre-installed nail bars with vertical slots are used to evenly align the bars horizontally after nailing halfway into wood joists.

#### • Optional "Quick Connect" Push-in wire connectors.

- Three "Quick Connectors"
- Pre-installed push-in wire connectors for fast and easy wiring.

#### • Compliance

- Washington State Energy Code.
- New York State Energy Conservation Construction Code.
- Certified AIR-TIGHT Under ASTM E283.

### Ordering Information

Housing	Ballast	Lamp(s) Watt.	Option
ICF-626AT	-N : 120V NPF Magnetic -H : 120V HPF Magnetic -NE : 120V NPF Electronic -HE : 120V HPF Electronic -E : 120V/277V HPF Electronic	113 : (1)13W 132 : (1)32W 118 : (1)18W 213 : (2)13W 126 : (1)26W 218 : (2)18W	-EM : Emergency w/ Remote Test Switch -C : Quick Connectors

Example : ICF-626AT-E218

# Trims

## 6" Horizontal Compact Fluorescent Trims For

DLF-616, DLF-616R, DLF-626, ICF-626AT

Catalog #		Type
Project		Date
Prepared by		


**FLUORESCENT**

### TM-39R/TM-39RF TM-39RL

**Specular Open Reflector**  
2x26W DTT, 1x42W TTT

White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"

\*Symbol (RF) is for Self-flange



### TM-30B TM-30BL

**Baffle w/ Reflector**  
2x26W DTT, 1x42W TTT

White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-31

**Wall Wash w/ Kick-off Plate**  
2x26W DTT, 1x42W TTT


White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-36B TM-36BL

**Baffle w/ Fresnel Lens**  
2x26W DTT, 1x42W TTT

White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"

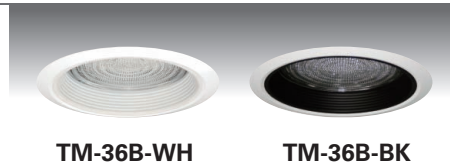

### TM-36R TM-36RL

**Reflector w/ Fresnel Lens**  
2x26W DTT, 1x42W TTT


White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-38 TM-38L

**Reflector w/ Frosted Drop Lens**  
2x26W DTT, 1x42W TTT

White Metal Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"

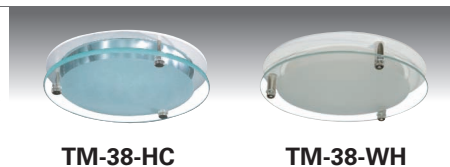

### TM-38S TM-38SL

**Reflector w/ Frosted 3.5" Center Drop Lens**  
2x26W DTT, 1x42W TTT

White Metal Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-359 TM-359L

**Reflector w/ Cross Louver Blade**  
2x26W DTT, 1x42W TTT

White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-354 TM-354L

**Reflector w/ Wall Wash**  
2x26W DTT, 1x42W TTT


White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"



### TM-39R-1 (One Lamp)

**Specular Open Reflector**  
1x26W DTT, 1x42W TTT

White Plastic Trim Ring  
O.D : 7-7/8"  
Height : 6-1/4"  
Aperture : 2-1/8"x2-1/8"



- ◆ White plastic ring standard. Also available with metal rings.
- ◆ All trims are damp location, Lens trims are wet location listed.
- ◆ Symbol "L" is for 5-3/16" Shallow reflectors.

## ORDERING INFORMATION

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL	REFLECTOR	LENS	BAFFLE	METAL RING
	CL :Clear	FR :Fresnel	WH :White	WH :White
	WH :White	AS :All Sanded	BK :Black	BK :Black
	GD :Gold	CL :Clear	SN :Satin Nickel	SN :Satin Nickel
	MA :Matte Platinum	CV :Convex Prismatic	AN :Antique Nickel	AN :Antique Nickel
	CP :Champagne	AL :Albalite	AC :Antique Copper	AC :Antique Copper
	PR :Pewter		MO :Mocha	MO :Mocha
	HC :Haze Clear		CA :Cappuccino	CA :Cappuccino
			CH :Chrome	CH :Chrome
			UN :Natural Steel	UN :Natural Steel
			PB :Polished Brass	PB :Polished Brass

Examples:

TM-39R-HC-WP = Haze Clear Reflector

TM-30B-BK-WP = Black Baffle w/Clear Reflector