# IC-806R 120V Line Voltage

6" IC Type Remodel Housing For Sloped Ceiling

Catalog #	Туре
Project	Date
Prepared by	

# INCANDESCENT




# **DESCRIPTION**

Sloped ceiling IC remodel housing designed for installation in areas where the backside of the ceiling is inaccessible.

# **APPLICATION**

The IC-806R is designed for insulated ceilings and can be in direct contact with insulation material.

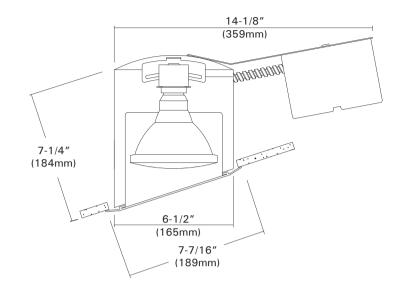

#### **DESIGN FEATURES**

#### Housing

- Single wall aluminum housing.
- 7-1/4" height allows use in 2"X8" joist construction.
- Housing adjusts for ceilings up to 1/2" thick.

#### Junction Box

- Listed for through branch circuit wiring.(Max.8 No 12 AWG 90℃ branch circuit conductors. (4 in, 4 out)
- (5)1/2" knockouts with true pry-out slots and (4) knockouts with Romex cable clamp.
- Ground wire provided on J-box.

#### Remodel Clips

 3 remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

#### Socket

- Medium base porcelain with nickel-plated copper screw shell.
- Adjustable to position lamp perpendicular to floor.

#### Lamp

• Lamp ratings based on trim selected - See trim page for more details.

#### Thermal Protector

 Self-resetting thermal protector in the housing deactivates fixture if overheating occurs due to improper lamping or insulation.

#### \* Listing

- UL, c-UL listed for damp location.
- UL, c-UL listed for feed through.

Oval Ceiling Cut-out: 7-1/16"x6-7/8" Lamp, Max, Watt.: 75W A19 / R30 / PAR30

- Optional "Quick Connect" Push-in wire connectors.
  - Three "Quick Connectors"
  - Pre-installed push-in wire connectors for fast and easy wiring.

# **Trims**6" Incandescent Trims For

DL-906, DL-906R, IC-806, IC-806R, IC-906AT

Catalog #	Туре
Project	Date
Prepared by	

# INCANDESCENT

### TM-4BL

Slope Baffle

NON-IC: R40/PAR38-150W IC: PAR30/38-75W Max. IH-690ICA: PAR38-90W

White Plastic Trim Ring O.D: 7-7/8"



TM-4BL-WH TM-4BL-BK

#### **TM-38E**

Eyeball w/ Baffle PAR30/R30-75W

White Metal Trim Ring O.D: 8-1/8"



TM-38E-WH

# TM-4RL

Slope Reflector NON-IC: R40/PAR38-100W IC: PAR30/38-75W Max.

IH-690ICA: PAR38-90W White Plastic Trim Ring O.D: 7-7/8"



TM-4RL-CL

TM-4RL-GD

#### **TM-7/TM-7P**

Shower Fresnel Lens NON-IC: A19-60W IC: A19-40W

White Plastic Trim Ring
O.D: 8-1/8"
\*Symbol (P) is for Lexan Trim



TM-7-WH

### TM-8E

Eyeball PAR30/R30-75W

White Metal Trim Ring O.D: 8-1/8"



TM-8E-WH

#### **TM-6/TM-6P**

Shower Drop Opal NON-IC: A19-60W IC: A19-40W

White Plastic Trim Ring
O.D: 8-1/8"
\*Symbol (P) is for Lexan Trim



TM-6-WH

# **TM-98E**

Regressed Eyeball w/ Baffle PAR30/R30 - 75W

White Plastic Trim Ring O.D: 7-7/8"



TM-98E-WH



TM-98E-BK

#### TM-5/TM-5P

Shower Albalite Lens NON-IC: A19-60W IC: A19-40W

\*Symbol (P) is for Lexan Trim

White Metal Trim Ring O.D: 8-1/8"



TM-5-WH


# 6" Incandescent Trims For

DL-9068, DL-9068R, IC-8068, IC-8068R, IC-9068AT

## TM-48BL

Super Slope Baffle NON-IC: R40/PAR38-150W IC: PAR30/R38-75W Max.

White Plastic Trim Ring O.D: 9-5/32" x 7-3/4"



TM-48BL-BK

# TM-48RL

Super Slope Reflector NON-IC: R40/PAR38-150W IC: PAR30/R38-75W Max.

White Plastic Trim Ring O.D: 9-5/32" x 7-3/4"



TM-48RL-CL

### **ORDERING INFORMATION**

Choose the catalog / finish codes that best suit your needs and enter it on the appropriate line.

TRIM MODEL		REFLECTOR		BAFFLE		METAL RING	
	CL	:Clear	WH	:White	WH	:White	
	WH	:White	вк	:Black	BK	:Black	
	GD	:Gold	SN	:Satin Nickel	SN	:Satin Nickel	
	MA	:Matte Platinum	AN	:Antique Nickel	ΑN	:Antique Nickel	
	CP	:Champagne	AC	:Antique Copper	AC	:Antique Copper	
	PR	:Pewter	MO	:Mocha	MO	:Mocha	
	HC	:Haze Clear	CA	:Cappuccino	CA	:Cappuccino	
			CH	:Chrome	CH	:Chrome	
			UN	:Natural Steel	UN	:Natural Steel	
			PB	:Polished Brass	PB	:Polished Brass	

#### Examples:

TM-6P-WH = Drop Opal Lens w/ White Lexan Trim Ring
TM-98E-BK-WO = White Trim Ring with White Eyeball & Black Baffle
TM-48BL-BK-WO = White Trim Ring with Black Super Slope Baffle
TM-5-WH = Albalite Lens w/ White Trim Ring